







慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书

THE SPEC SHEET

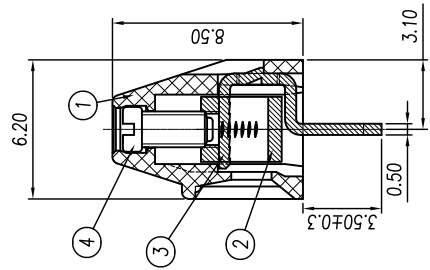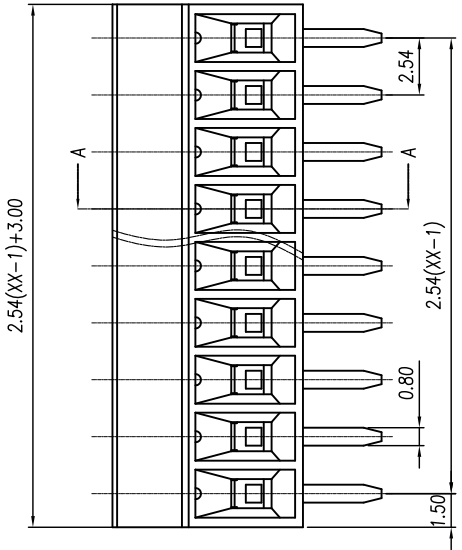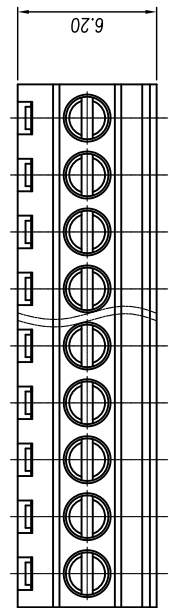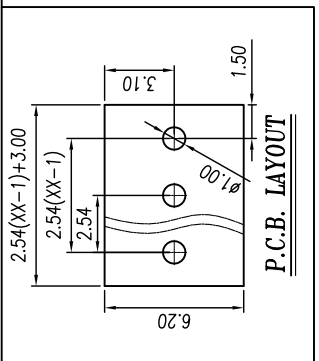

参考标准/Standard	UL	IEC
额定电压/Rated voltage	150V	130V
额定电流/Rated current	6A	8A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	26~18AWG	1.0mm ²
耐压/With standing voltage	AC 1300V/1 Min	
机械性能/Mechanical		
扭矩/Torque	0.1Nm(0.88Lb.in)	
温度范围/Temp.Range	-40°C~+105°C	
瞬时温度/MAX Soldering	+250°C, for 5 Sec	
尺寸/Dimensions		
间距/Pitch	2.54mm	
极数/Poles	2~24P	
材质及电镀/Material	PA66, UL94V-0	
塑件/Housing	M1.6 Steel Zn plated	
螺丝/Screws	Copper alloy Tin plated	
焊脚/Pin header	Copper alloy Ni plated	
方块/Cage		

variable range	linear dimension(Tolerances Standard GB/T 14486-2008)															
	to 6	to 10	to 18	to 30	to 50	to 80	to 120	to 160	to 200	to 250	all	to 5	to 30	to 120	to 0.4	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 3:1

第三视图THIRD ANGLE PROJECTION

名称/TITLE WJE/254-2.54-XXP-1YY-00A

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD